

**CORTEX**  
Representaciones  
Industriales

Needles, Sinkers and Spare Parts

**C.P Carlos Cortés Navarro**  
Gerente General

Tel: (55) 2451 - 9557 • (55) 2451 - 9558  
☎ (55) 3026 - 1737 • (55) 1953 - 0468  
Email: ventascortex@gmail.com

Colorines Pte. #45 Col. Arcos del Alba  
C.P. 54750, Cuautitlán Izcalli,  
Estado de México

www.cortexmx.com • www.cortex-mexico.com



**WELLRICH**

www.wellrichmachine.cn

**WELLRICH**

WELL KNITTING, TO BE RICH

追求卓越, 锐不可当

泉州市卓锐针织机械有限公司  
QUANZHOU WELLRICH KNITTING MACHINERY CO.,LTD.

针筒总针数:(参考表)

Total Number Of Needles In The Cylinder (Reference Table)

Dia of Cylinder 针筒直径 (N.P.I.) GAUGE	14"	15"	16"	17"	18"	19"	20"	21"	22"	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	34"	35"	36"	38"	40"
12	528	576	600	636	672	720	756	792	828	864	912	948	984	1020	1056	1092	1140	1176	1212	1248	1284	1320	1356	1428	1500
13	576	612	660	696	732	780	816	852	900	936	984	1020	1068	1104	1152	1188	1224	1272	1308	1356	1392	1428	1464	1536	1600
14	624	660	708	756	756	840	888	936	984	1020	1056	1104	1140	1188	1236	1272	1320	1356	1404	1440	1500	1356	1584	1668	1752
15	660	708	756	804	852	900	948	996	1032	1080	1128	1176	1224	1272	1320	1368	1416	1464	1500	1560	1596	1656	1680	1764	1848
16	708	756	816	864	912	960	1008	1056	1104	1152	1200	1260	1320	1356	1404	1464	1500	1560	1620	1656	1704	1752	1800	1896	1992
17	744	804	852	912	960	1020	1080	1128	1188	1236	1284	1332	1380	1440	1548	1560	1620	1656	1704	1752	1812	1860	1920	2028	2148
18	792	852	900	960	1020	1080	1140	1200	1260	1308	1356	1404	1440	1500	1580	1620	1680	1740	1800	1860	1920	1980	2040	2160	2280
19	840	900	960	1020	1080	1140	1200	1260	1320	1380	1440	1500	1560	1620	1680	1740	1800	1860	1920	1980	2040	2076	2160	2280	2400
20	876	948	1008	1080	1140	1200	1260	1320	1380	1440	1500	1572	1632	1692	1752	1836	1896	1956	2016	2076	2136	2196	2256	2376	2496
21	924	984	1080	1140	1200	1260	1320	1380	1440	1500	1620	1680	1712	1800	1860	1920	1980	2040	2112	2172	2232	2292	2352	2472	2592
22	984	1032	1104	1188	1260	1320	1380	1440	1512	1548	1680	1740	1800	1860	1920	1992	2052	2136	2220	2196	2352	2412	2472	2592	2712
23	1008	1080	1152	1236	1308	1380	1440	1512	1572	1656	1740	1800	1872	1944	2016	2100	2172	2232	2316	2376	2460	2520	2592	2712	2832
24	1044	1128	1200	1284	1356	1440	1500	1620	1680	1740	1800	1884	1956	2028	2100	2172	2256	2340	2412	2476	2556	2616	2700	2844	2988
26	1140	1224	1308	1380	1464	1560	1632	1716	1800	1872	1956	2040	2124	2196	2208	2352	2448	2532	2592	2676	2780	2856	2940	3100	3260
28	1224	1360	1392	1476	1584	1656	2752	1836	1920	2016	2100	2196	2280	2376	2460	2532	2640	2712	2796	2892	2976	3060	3156	3336	3516
30	1320	1416	1500	1620	1680	1800	1896	1980	2052	2172	2256	2352	2448	2544	2640	2724	2820	2916	3012	3108	3204	3288	3384	3564	3714
32	1404	1500	1626	1704	1800	1920	2016	2112	2220	2316	2412	2592	2796	2712	2080	2904	3012	3108	3016	3312	3408	3516	3612	3186	4020

— 请企划 TEL: 0595-22981065 13506008841

# 公司简介

# COMPANY PROFILE



泉州市卓锐针织机械有限公司创建于2007年,专业从事产品研发和制造针织大圆机。

公司为消费者提供多样性的针织大圆机产品包括高速单双面针织机、4色6色自动调线机、单双面电脑大提花机、单双面调线提花机、单双面开幅机、三线卫衣机、单面正反包毛圈机、单双面小圆机等,公司本着“诚信、求实、创新”的企业宗旨,坚持“以质量为本、信誉第一”的经营理念,“以顾客满意度”为方向,通过先进的技术、优质的设备、优惠的价格、完善的服务,带给广大客户最大的利益!并获得高新技术企业证书,公司严格执行各项国际标准,为不断提高企业形象和自身实力做出更大努力!

卓锐机械愿景是成为一个极具国际竞争力、让国人为之骄傲的世界级企业,公司现正在领导层的带领下,围绕着“做大做强做优”和打造针纺机械行业的“航母”,向着“中国第一、世界一流”的目标不断迈进。

Quanzhou Wellrich Knitting Machinery Co.,Ltd was established in 2001, situated in the famous "Silk Road" starting point - Quanzhou.

Company specializes in manufacturing various kinds of Circular Knitting Machine, ranging from 6 inches to 44 inches.

Elite of Technical Support and Research Team comprises of different segments from the textile industries which enable comprehensive solution in the process of garment production.

Company owns various patents and innovation of circular knitting machine which certify by the Chinese government agency.

Company product lines include:

- 1.High Speed Single Jersey Circular Knitting Machine
- 2.High Speed Interlock Circular Knitting Machine
- 3.Four Color and Six Color Single Jersey and Interlock Auto Stripper Circular Knitting Machine
- 4.Single Jersey and Interlock Jacquard Circular Knitting Machine
- 5.Open Width Single Jersey / Double Jersey Circular Knitting Machine
- 6.Platting Fleece Circular Knitting Machine
- 7.Pollar / Terry Circular Knitting Machine




# WELLRICH

Manufacturing Workshop

生产车间



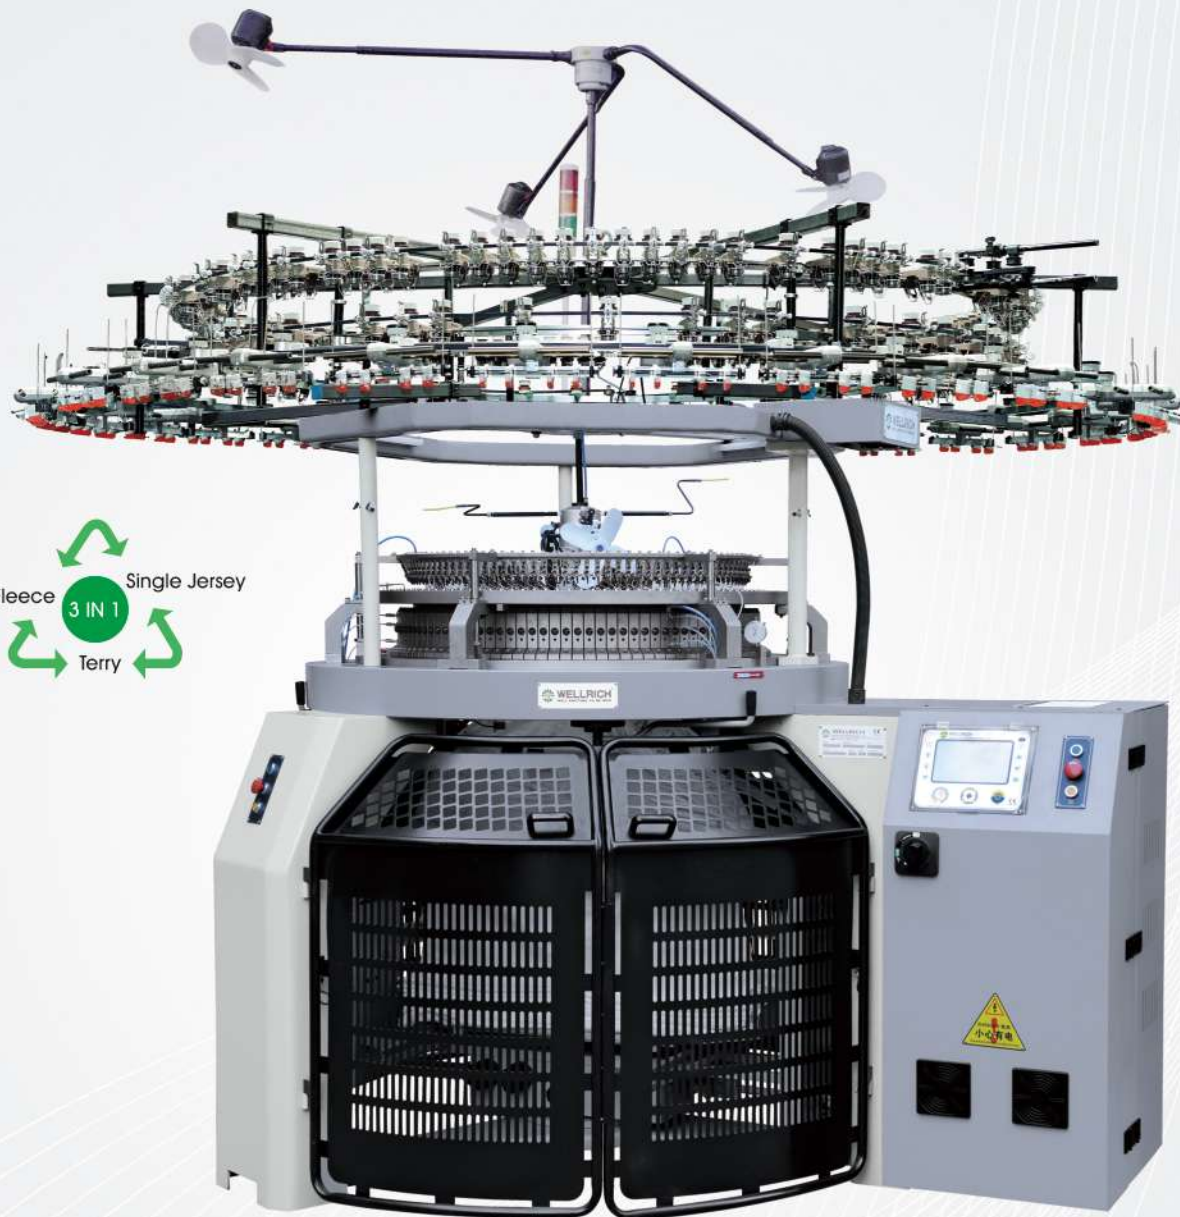

SJ-3.0F/SJ-3.2F/SJ-4F/SJ-6F

### 单面高速机

High Speed Single Jersey  
Circular Knitting Machine



追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 本机型设计散热性更好，操作更简单，布面效果更好。动力方面采用大功率进口电机。进口品牌变频器及新型电子控制面板，可监控机台异常及记录各项资料使操作者掌握生产线的最佳状态，及时保护机台的正常运作。
- 单面高速万能机型采用中心调整四跑道三角，是用来生产各种单面织布最重要的机种。码重调整间距分隔小，调整简易精确，可生产不同码重的平布，如棉布，混纱布，TTC双层布，人造丝麻布等，产品用于汗衫，T恤，运动装等。
- 配备4段三角更富机动性，可经过选针，三角排列；即可生产汗布，网眼布，单面涤盖棉，氨纶布，菜瓜布，泳装面料等，制成韵律装，泳衣。



- Single Jersey Circular Knitting Machine is designed with better heat dispersion, Machine user friendly equips with high quality AC motor and motor controlling inverter and latest control panels. It can monitor the working condition of the machine and record the data so that the operator aware of the condition of the machines to keep the machine in its normal function and running.
- The machine designed with four tracks cams on cylinder and central stitch systems, which is used to manufacture all kinds of single jersey fabric. Fabric density can be slightly adjusted and the adjustment is easy and precise. It is used to produce knit fabric with different density and structure.
- Common structure like single jersey fabric, Pique, Lacoste, Swimwear and more.
- With four tracks cams on cylinder provides with more maneuverability by the arrangement of cams and needles.

### 技术规格/TECHNICAL DATA

筒径	26"-44"/1英寸3路	Diameters	26"-44"/ 3Feeders per inch
	26"-44"/1英寸3.2路		26"-44"/ 3.2Feeders per inch
	26"-44"/1英寸4路		26"-44"/ 4Feeders per inch
	26"-44"/1英寸6路		26"-44"/ 6Feeders per inch
针距	7G-50G	Gauge	7G-50G
	78F-132F		78F-132F
路数	84F-142F	Feeders	84F-142F
	104F-176F		104F-176F
	156F-264F		156F-264F
	18-40 R.P.M		18-40 R.P.M
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
选配置	氨纶准备装置	Optional Equipment	Lykra kits
	氨纶送纱装置		Lykra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	开幅机架		Open width frame
	大圆机联网系统		Circular knitting machine networking system



FL-3.0F/FL-3.2F

### 三线卫衣机

Three-thread Fleece Knitting Machine



追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features


- 三线卫衣机是本公司优势的产品，可以编织鱼鳞布、斜纹及法兰西双卫衣布，尤其是包丝卫衣、雪花布、细纱卫衣、小提花卫衣布等。集多款高难度布种于一身，成为行业的佼佼者。
- Three-thread fleece knitting machine is the most advantaged product of the company. It can knit fish scale fabric, drill flannelette, especially raw silk fleece, snow canvas, dobbie fleece fabric other complicated fabric. The machine is the best of the best.



WELLRICH

### 技术规格/TECHNICAL DATA

筒径	26"-44"/1英寸3路	Diameters	26"-44"/ 3Feeders per inch
	26"-44"/1英寸3.2路		26"-44"/ 3.2Feeders per inch
针距	10G-24G	Gauge	10G-24G
路数	78F-132F	Feeders	78F-132F
	84F-142F		84F-142F
转速	18-30 R.P.M	RPM	18-30 R.P.M
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	开幅机架		Open width frame
	大圆机联网系统		Circular knitting machine networking system

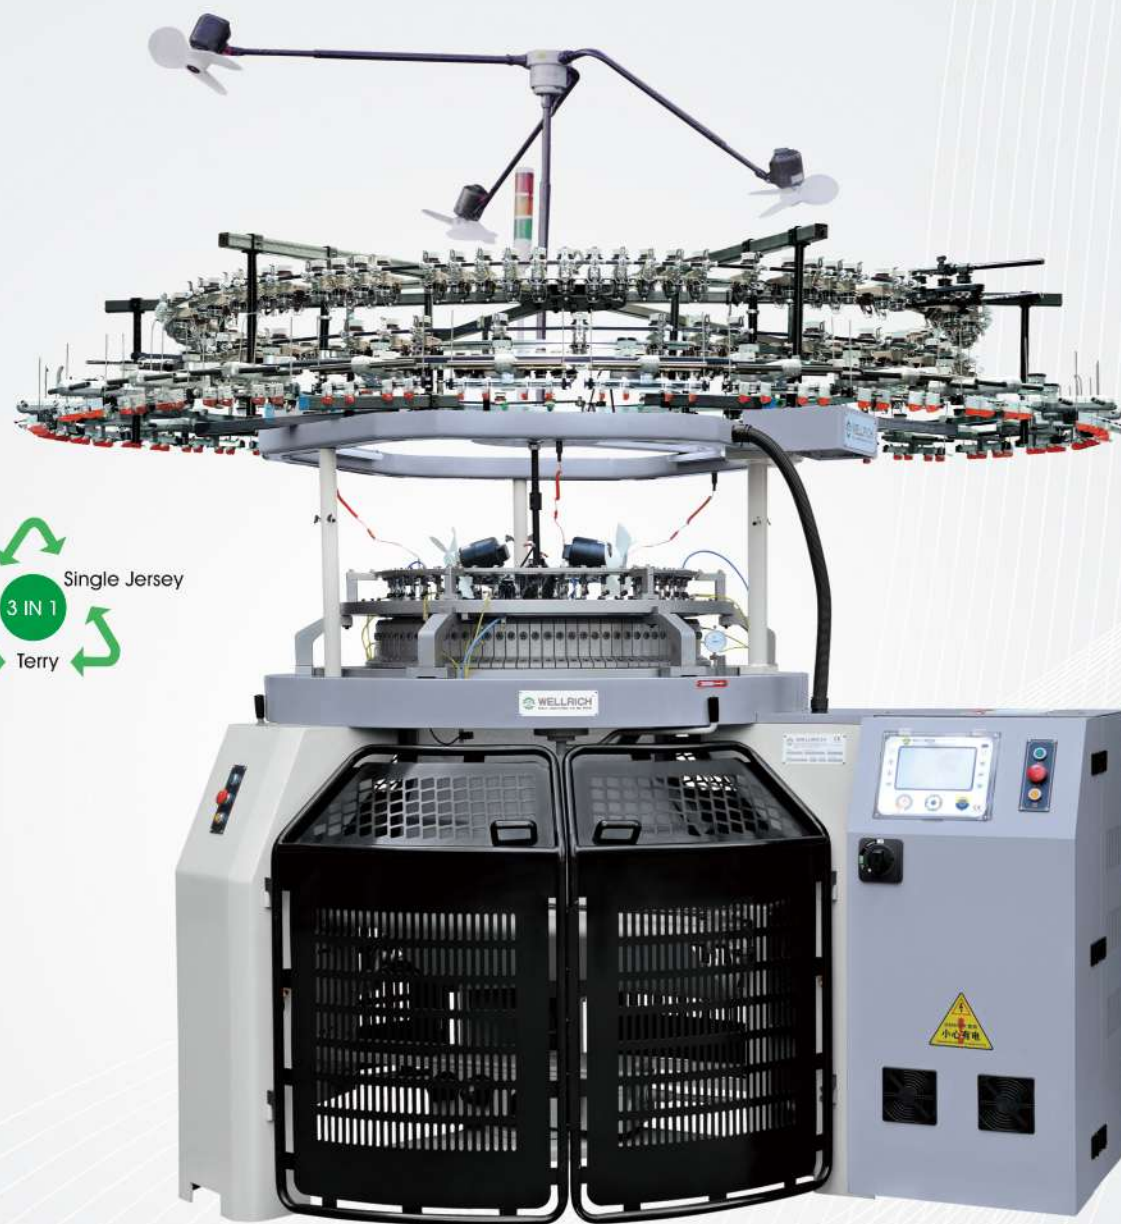

TR-1.5F/TR-1.6F/TR-2.0F/DTR

反包毛巾机

Terry (Original Loop) Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features


- 此机型为我公司最主力畅销产品，其具有性能优越，产量高等特点。机器严格的高精密结构，更能确保织物的品质。多年来此项产品得到业界的一致推崇。机器特殊设计之沉降片，趋于完美之反包效果，使毛线长度稳定平整均匀，不漏底：加工前毛后之用毛瑕疵亦不会产生，且可提供不同毛长之沉降片供客户采用。可生产天儿绒摇粒布、网眼毛巾布。及各种二段PK组织毛巾布。除了一般的长短纤维外，也适织电子丝绒，单面/双面刷毛巾，剪毛损耗一般在15%以内；生产后成V型(尖型)圈，且直立不歪道，使后整理磨毛、剪毛、抓毛的消耗更低。面目清爽，毛圈牢固，长度一致等特点，可生产天鹅绒，砖石绒，密丝绒及各种反包布类。
- 该机器广泛用于高级服装、运动装、婴儿、幼儿。男女服装及工业用布等。此机可织完美之包底效果，成品包含：一般毛巾布，处理过程成为单/双面刷毛布，毛毯颗粒布，或超细纤维制品等。

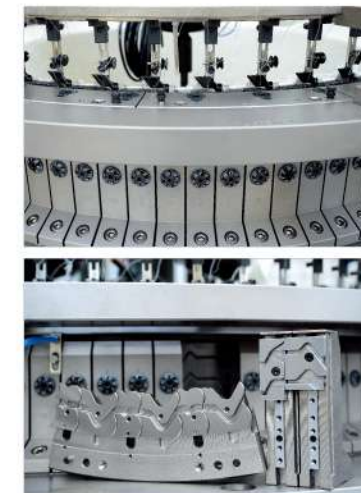

- This model is the best selling product of our company. It has the characteristics of superior performance and high output. The high precision structure of the machine ensures the quality of the fabric. Over the years, this product has been highly praised by the industry. The special design settling sheet of the machine sinker to perfect the anti-wrapping effect, which makes the length of the wool stable and even, and provides settling sheets of different wool len lengths for customers to adopt. It can produce flannel cloth and mesh knit cloth and so on. In addition to the ordinary long and short fibers, it is also suitable for weaving electronic velvet.

### 技术规格/TECHNICAL DATA

规格	26" × 38"	1.5F/寸	Specification	26" × 38"	1.5F/Inch
		1.6F/寸			1.6F/Inch
		2F/寸			2F/Inch
针距	18G-28G	Gauge	18G-28G		
织针	85.52/89.52/110.49/110.52	Knitting needle	85.52/89.52/110.49/110.52		
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device		
	自动喷雾式加油装置		Automatic lubrication device		
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors		
	卷布系统		Take down system		
	自动除尘装置		Automatic cleaning device		
	纱架系统		Yarn creel system		
选配装置	氨纶准备装置	Optional Equipment	Lycra kits		
	氨纶送纱装置		Lycra feeder units		
	摆布叠布装置		Folding device		
	纱线输入测量装置		Yarn input measuring device		
	开幅机架		Open width frame		
	大圆机联网系统		Circular knitting machine networking system		

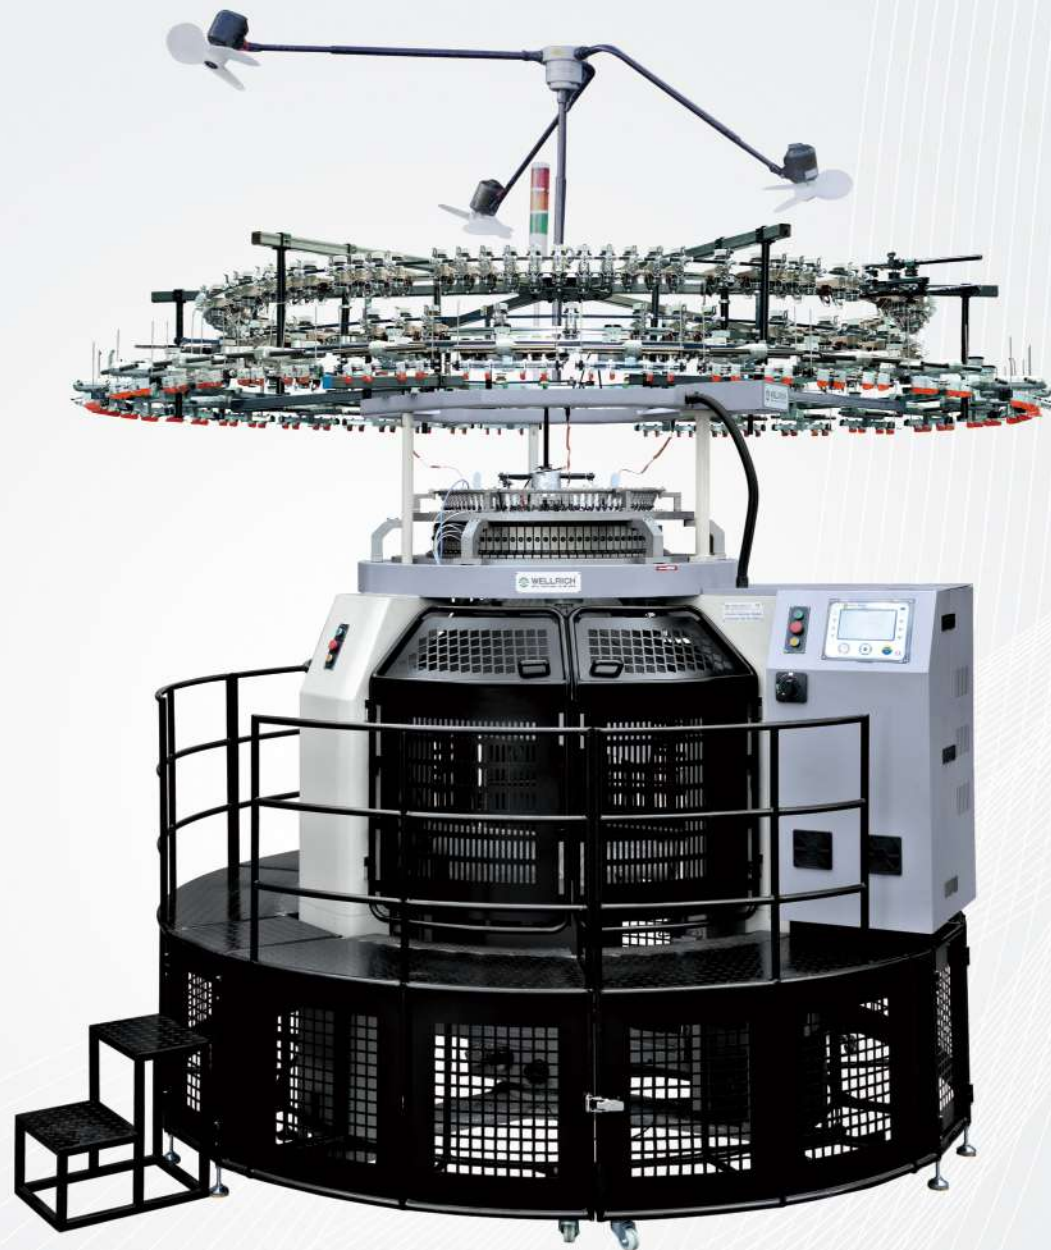

SJ-HF-3.0F/SJ-HF-3.2F

### 高脚高速单面机

High Frame High Sped Single Jersey Circular Knitting Machine



追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features


- 本机型设计散热性更好，操作更简单，布面效果更好。动力方面采用大功率进口电机。进口品牌变频器及新型电子控制面板，可监控机台异常及记录各项资料使操作者掌握生产线的最佳状态，及时保护机台的正常运作。
- 单面高速万能机型采用中心调整四跑道三角，是用来生产各种单面织布最重要的机种。码重调整间距分隔小，调整简易精确，可生产不同码重的平布，如棉布，混纱布，TTC双层布，人造丝麻布等，产品用于汗衫，T恤，运动装等。
- 配备4段三角更富机动性，可经过选针，三角排列；即可生产汗布，网眼布，单面涤盖棉，氨纶布，菜瓜布，泳装面料等，制成韵律装，泳衣。
- 增加机器使用效率及面料单匹重量，单卷最大可做300KG



- Single Jersey Circular Knitting Machine is designed with better heat dispersion, Machine user friendly equips with high quality AC motor and motor controlling inverter and latest control panels. It can monitor the working condition of the machine and record the data so that the operator aware of the condition of the machines to keep the machine in its normal function and running.
- The machine designed with four tracks cams on cylinder and central stitch systems, which is used to manufacture all kinds of single jersey fabric. Fabric density can be slightly adjusted and the adjustment is easy and precise. It is used to produce knit fabric with different density and structure.
- Common structure like single jersey fabric, Pique, Lacoste, Swimwear and more.
- With four tracks cams on cylinder provides with more maneuverability by the arrangement of cams and needles.
- 1 Increase the machine production and fabric capacity, can make Max. 300KG per roll.

### 技术规格/TECHNICAL DATA

筒径	26"-44"/1英寸3路	Diameters	26"-44"/ 3Feeders per inch	
	26"-44"/1英寸3.2路		26"-44"/ 3.2Feeders per inch	
	26"-44"/1英寸4路		26"-44"/ 4Feeders per inch	
	26"-44"/1英寸6路		26"-44"/ 6Feeders per inch	
针距	7G-50G	Gauge	7G-50G	
	78F-132F		78F-132F	
	84F-142F		84F-142F	
	104F-176F		104F-176F	
路数	156F-264F	Feeders	156F-264F	
	18-40 R.P.M		RPM	18-40 R.P.M
	积极式送纱装置			Positive feeding device
	自动喷雾式加油装置			Automatic lubrication device
断纱自停和坏针自停装置	Yarn feed stop motion, needle break detectors			
标准配备	卷布系统	Standard Equipment	Take down system	
	自动除尘装置		Automatic cleaning device	
	纱架系统		Yarn creel system	
	氨纶准备装置		Lycra kits	
选配置	氨纶送纱装置	Optional Equipment	Lycra feeder units	
	摆布叠布装置		Folding device	
	纱线输入测量装置		Yarn input measuring device	
	开幅机架		Open width frame	
	大圆机联网系统		Circular knitting machine networking system	

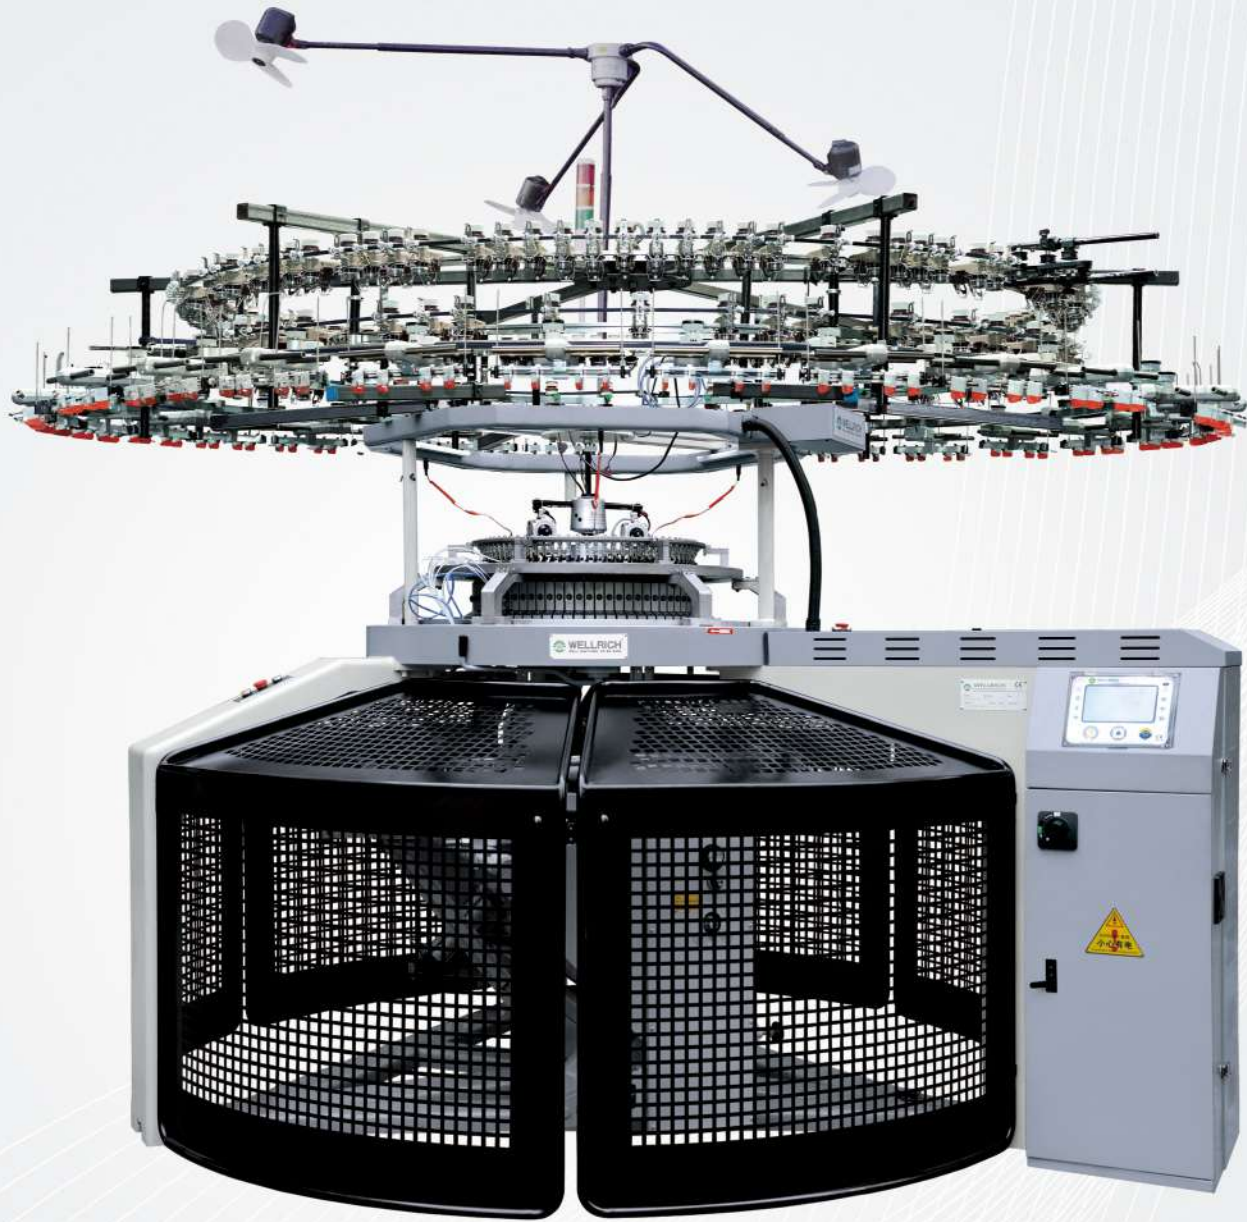

SJ-0W-3.0F/SJ-0W-3.2F

### 单面系列开幅机

Single Jersey Open Width  
Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 本机可固定大小布匹松紧度，使织针寿命长。
- 本机使用时，布头与布尾之间距及码重一致。
- 压针系统。
- 本机采用可调式展布架，可调整下布之倾角，使得布匹平整，有效带动布匹卷收。
- 本机采用同步式卷收布匹，使布料于卷收后，张力平均，不易产生明暗度(水波纹)。
- 本机采用顺向牙轮推布，布匹于卷收时，无倒插现象，且布边平整，降低损耗。
- 本机之卷布杆，采外套管式，于布匹卷收完成后，易于抽取。
- 本机配有安全停机装置，当布匹裁割不全时，能自动停机。是生产弹力布最佳的选择。
- Specialize take down system adjusts tension of the fabrics so as to extend the life time of the needles.
- Uniform fabric density is guarantee in all parts of the fabric rolls.
- High precision pressjack system.
- Adjustable fabric spreader to adjust angles between the fabric roll and spreader according to the fabric features.
- Synchronously winding and rolling of the fabric to make sure the fabric is rolled in uniform tension, so as to avoid uneven marks on the fabric.
- The roll of the take down device is easy to take off when the winding and rolling is finished.
- Safety stop motion is equipped.
- This machine is specially suitable for stretch fabric manufacturing.

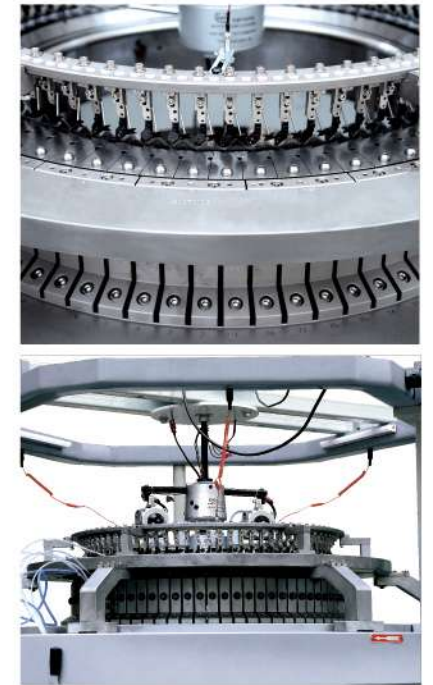

### 技术规格/TECHNICAL DATA

筒径	26"-42"	Diameters	26"-42"
针距	7G-42G	Gauge	7G-42G
路数	48F-252F	Feeders	48F-252F
转速	16-24 R.P.M	RPM	16-24 R.P.M
功率	5.5KW	Power	5.5KW
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system



DJ-1.8F/DJ-2.0F/DJ-2.1F/DJ-2.5F/DJ-3.2F  
/DJ-1.6F/DJ-2.4F/DJ-4.4F/DJ-2.8F/HP-N/HP-RIB

## 双面高速机

High Speed Interlock  
Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 高速双面针织机，此机型为我公司最畅销商品，性能优越，产量高，严格的高精密结构更能确保织物的品质。
- 本机型为上二段下四段及上四段下六段跑道双面机。能纺织变换花型组织。心脏部分采用全自动计算机雕刻一体成型工艺，保证了三角的精密度。
- 日本特殊合金钢制成的针筒有耐磨，耐高温等特性。更能生产出调质感的产品。采用西德钢线滚珠轴承系统确保上下高精度同步运行。速度快，平衡性强。
- 动力系统采用进口品牌变频面板系统，标示清晰，操作简易。更可通过织针三角排列变化，生产多种组织花样的布种，如小提花织物，泡泡，夹层亲垫，针织棉毛布。
- 加装氨纶盆盆，更可以制造不同织物，如弹力布等高级男女时装面料

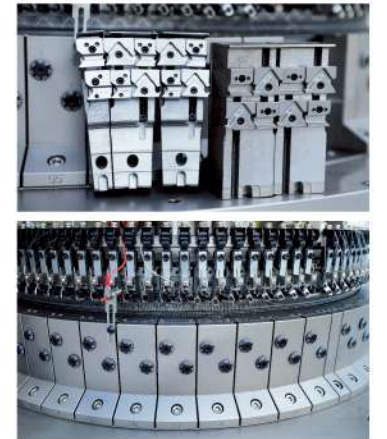

- This model Interlock knitting machine is designed with dial two track, cylinder four track or dial four track, cylinder six track. And it is capable of switching various knitting structure and patterns. Knitting heart and cams adopts automatic CAD integrated carving process to ensure the precision of the cams.
- Cylinder applies Imported alloy steel. Superior material steel metal with high frequency temperature treatment. More easy to knit texture clear fabric. Using Germany steel wire ball bearing system to ensure the high precision synchronous operation. You can run the machine in high speed with stability
- AC Inverter and control panel equipped with imported brands, which is easy to understand and operate. By arranging the knitting needles and cams to knit various fashionable structure fabric. Such as simple jacquard fabric, seersucker knit, space knitwear, interlock fabric.
- Lycra attachment is optional to knit stretch knitwear.

### 技术规格/TECHNICAL DATA

筒径	26"-44"/1英寸2路	Diameters	26"-44'/ 2Feeders per inch		
	26"-44"/1英寸2.1路		26"-44'/ 2.1Feeders per inch		
	26"-44"/1英寸2.5路		26"-44'/ 2.5Feeders per inch		
	26"-44"/1英寸2.8路		26"-44'/ 2.8Feeders per inch		
针距	18G-50G	Gauge	18G-50G		
	52F-88F		52F-88F		
	56F-94F		56F-94F		
	64F-110F		64F-110F		
路数	72F-122F	Feeders	72F-122F		
	15-30 R.P.M		RPM	15-30 R.P.M	
	积极式送纱装置			Positive feeding device	
	自动喷雾式加油装置			Automatic lubrication device	
标准配备	断纱自停和坏针自停装置	Standard Equipment		Yarn feed stop motion, needle break detectors	
	卷布系统		Take down system		
	自动除尘装置		Automatic cleaning device		
	纱架系统		Yarn creel system		
	选配置		氨纶准备装置	Optional Equipment	Lycra kits
			氨纶送纱装置		Lycra feeder units
摆布叠布装置		Folding device			
纱线输入测量装置		Yarn input measuring device			
开幅机架		Open width frame			
大圆机联网系统		Circular knitting machine networking system			





HP-N

### 高速割圈绒机

High Pile loop Cut Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 本系列机器采用上下齿轮同步传动，同步良好。上下齿轮均采用浸油式润滑，经久耐用，能长期保持高精密度。能做较密针数。
- 可采用钩刀分离或钩刀一体，一机双用。
- 织物表面无压痕，布面平整。产品可广泛应用于高档服装面料和床上用品、玩具绒、毛毯等。
- This series machine adopts the synchronous transmission between the top plate gear and main plant big gear. Both adopt the oil oil-steeped lubrication to make the machine durable use life and keep the high precision.
- It could choose assembly of separation or integration working way between needle hook and cutter.
- Fabrics are not embedded on the surface and keep smoothness. The products are widely used in knitting upscale cloth fabrics, bedding articles, toy floss, carpet etc.

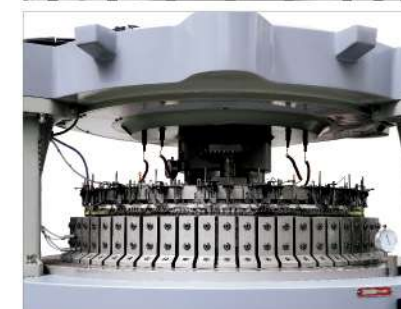

# WELLRICH

### 技术规格/TECHNICAL DATA

筒径	26"-38"	Diameters	26"-38"
针距	14G-28G	Gauge	14G-28G
路数	14F-20F	Feeders	14F-20F
转速	18-22 R.P.M	RPM	18-22 R.P.M
功率	3.7-5.5 KW	Power	3.7-5.5 KW
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	开幅机架		Open width frame
	大圆机联网系统		Circular knitting machine networking system



TR-SHEARING

机剪毛巾机

Shearing Terry Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

WELLRICH

机台特点 Machine Features


- 使用特殊除尘设计，减少清车率，提高刀片寿命。
- 布面具有反包的效果，但一次剪毛损耗比传统反包机低4-5个百分点，大大节约了生产成本。
- Special dusting design, it reduces machine-clean times and extends knife life.
- With reverse fabric effect, it saves 4% to 5% material consumption, which decreases cost and increase profit.

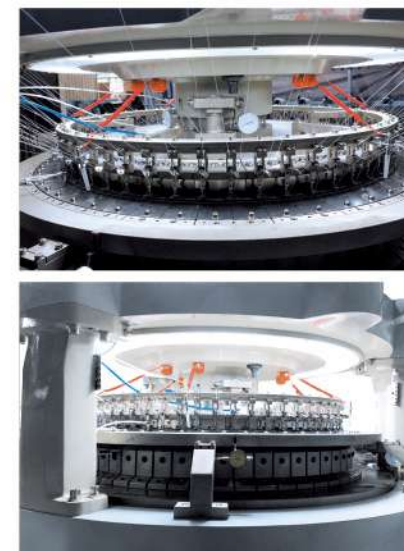

WELLRICH

技术规格/TECHNICAL DATA

筒径	30"	Diameters	26"-38"
针距	20G	Gauge	14G-28G
路数	1.6F	Feeders	14F-20F
转速	18-16 R.P.M	RPM	8-16 R.P.M
功率	3.5-7.5 KW	Power	3.5-7.5 KW
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
选配装置	纱架系统	Optional Equipment	Yarn creel system
	氨纶准备装置		Lycra kits
	氨纶送纱装置		Lycra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	开幅机架		Open width frame
	大圆机联网系统	Circular knitting machine networking system	

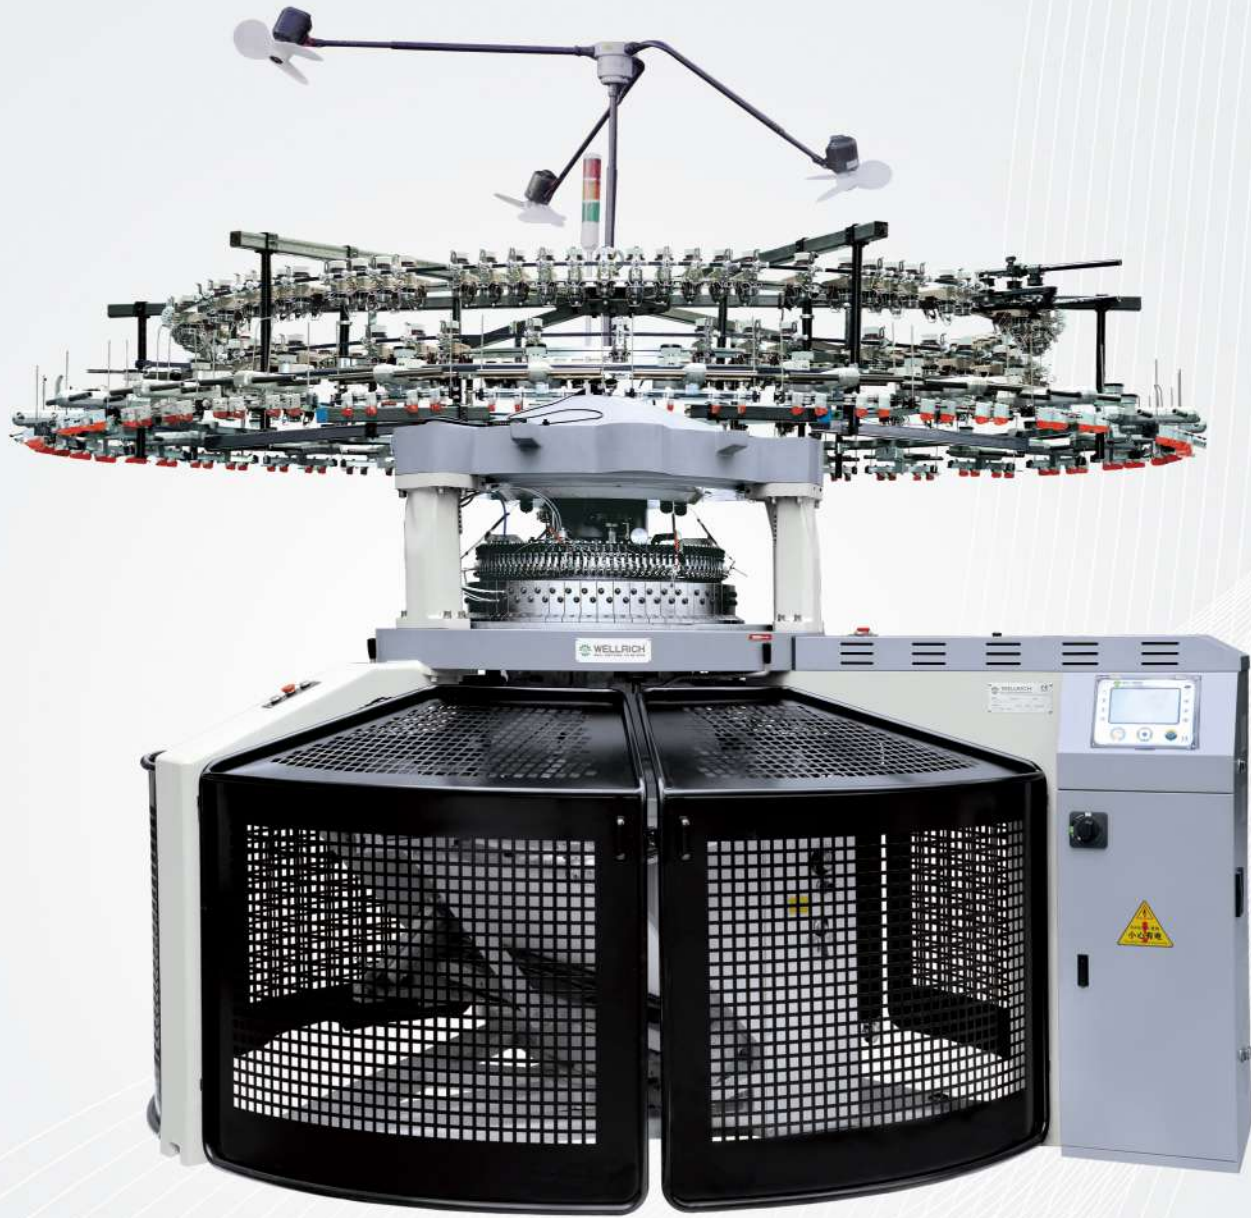

DJ-OW-2F/DJ-OW-2.1F/DJ-OW-2.4F/DJ-OW-3.2F/DJ-OW-3.6F

## 双面系列开幅机

Interlock Open Width  
Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 双面剖布针织大圆机，每英寸2.1路喂纱。
- 三角座针筒为4跑道针盘2跑道。
- 具有双面机的一切特性，性能优越、产量高、高精密度结构，确保织物的品质。
- 更换不同的三角排列，可编织双面布小提花、斜纹布、直条布等不同组织。
- 加氨纶配备，使织物更有弹性。
- 双面剖布机织出的织物卷取无折痕，使布匹得到全面利用，降低成本，提高利润。
- Double-sided cloth cutting circular knitting machine, 2.1 yarn feeding per inch.
- With all the characteristics of double-jersey machine, superior performance, high yield, high density structure, to ensure the quality of fabric.
- Cylinder cam box was 4 track, dial cam box was 2 track.

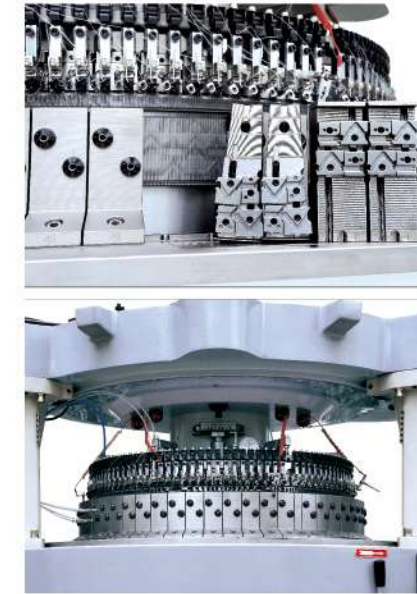

### 技术规格/TECHNICAL DATA

筒径	26"-44"/1英寸2路	Diameters	26"-44"/ 2Feeders per inch
	26"-44"/1英寸2.1路		26"-44"/ 2.1Feeders per inch
	26"-44"/1英寸2.5路		26"-44"/ 2.5Feeders per inch
	26"-44"/1英寸2.8路		26"-44"/ 2.8Feeders per inch
针距	18G-50G	Gauge	18G-50G
路数	52F-88F	Feeders	52F-88F
	56F-94F		56F-94F
	64F-110F		64F-110F
	72F-122F		72F-122F
转速	15-30 R.P.M	RPM	15-30 R.P.M
标准配备	积极式送纱装置	Standard Equipment	Positive feeding device
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feed stop motion, needle break detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
选配置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system



DJ-JQ/DJ-JQ-2.1F/DJ-JQ-2.4F/DJ-JQ-1.9F

## 双面电脑提花机

Computerized Double Jersey  
Jacquard Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 本机采用电脑选针器在针筒上选针，电脑选针器做出成圈，集圈，浮线两工位选针，任何复杂的组织结构及工艺图案均可通过电脑花型准备系统转换成控制程序，存入U盘输入控制系统即可织出花型不受限制的提花织物，节省了更换花型的时间，提高工作效率和效益。
- 专业研制的三角系统，损针少，转速高。
- 导纱嘴由陶瓷材料制成，适合织造各种原料，杜绝普通钢纱嘴因瓷眼的脱落影响布匹质量的稳定。
- Advanced needle selection system enables various fashionable jacquard patterns applide. System itself can simply be realized by transferred into specific instructions by cyber aided pattern system accurately and systematically. These instructions control knitting machine cyber-solenoids to knit single jersey jacquard fabric.
- Professional cam designed system ensure less needle wearing and higher rotation speed.
- Yarn guide was made by ceramic material, suitable for knitting various kinds of raw material.

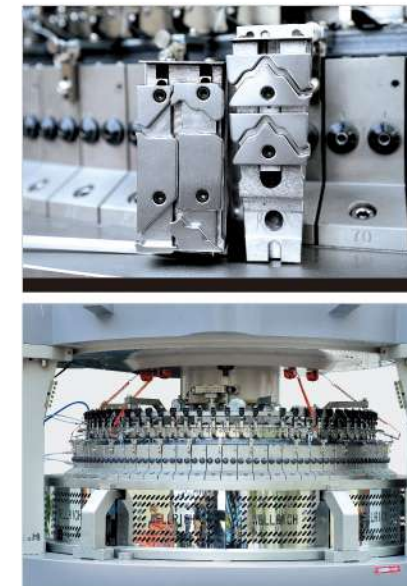

# WELLRICH

### 技术规格/TECHNICAL DATA

筒径	26"-38"/1英寸1.6路	Diameters	26"-38'/ 1.6Feeders per inch	
	26"-38"/1英寸1.8路		26"-38'/ 1.8Feeders per inch	
	26"-38"/1英寸2.1路		26"-38'/ 2.1Feeders per inch	
针距	7G-32G	Gauge	7G-32G	
	42F-60F		Feeders	42F-60F
	46F-68F			46F-68F
路数	54F-80F	RPM	15-25 R.P.M	
	15-25 R.P.M		Standard Equipment	Automatic lubrication device
标准配备	自动喷雾式加油装置	Yarn feeding stop motion sensor, needle breakage detectors		
	断纱自停和坏针自停装置	Take down system		
	卷布系统	Automatic cleaning device		
	自动除尘装置	Yarn creel system		
	纱架系统	Two or Three way needle selection system		
	两工位/三工位选针系统	Electric control cabinet special used for computerized jacquard		
	电脑提花专用电控箱	Optional Equipment	Lycra kits	
氨纶准备装置	Lycra feeder units			
氨纶送纱装置	Folding device			
摆布叠布装置	Yarn input measuring device			
纱线输入测量装置	Circular knitting machine networking system			
选配装置	大圆机联网系统			



SJ-JQ

## 单面电脑提花机

Computerized Single Jersey  
Jacquard Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH


### 机台特点 Machine Features

- 本机采用电脑选针器在针筒上进行选针，编织花型范围不受限制的提花织物。电脑选针器可作出成圈，集圈和浮线三工位选针。任何复杂组织结构的工艺图案均可通过电脑花型准备系统换成专门的控制指令。这些指令控制机械上的电脑选针器编织单面大提花织物。
- 精密的编码器可准确的计算出织针的位置和校正零位，该编码器也能够自动的校正开机和停机时因惯性形成的误差，为了选针的准确性，另外还增加了一个控制器来追加校零作用，控制系统能够检查编码器，判断编码器的信号是否适当，从而保证了整个系统的稳定性。
- Advanced needle selection system enables various fashionable jacquard patterns applide. System itself can simply be realized by transferred into specific instructions by cyber aided pattern system accurately and systematically. These instructions control knitting machine cyber-solenoids to knit single jersey jacquard fabric.
- Precise encoder can accurately calculate the position and calibration position of needles, as well as automatically calibrate any error for the inertia caused by turning on or off the machine. In addition, a detector is added to assist zero position calibration for accuracy of selection, thus the control system can check the encoder and the propriety of signal to ensure the total stability of the system.

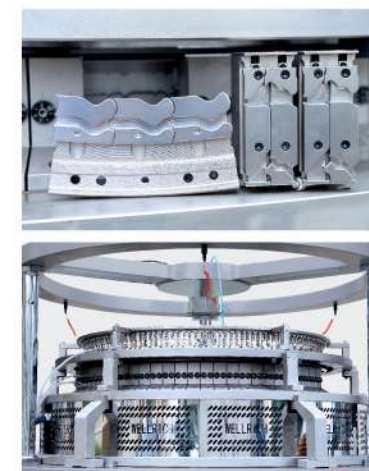

### 技术规格/TECHNICAL DATA

筒径	26"-38"/1英寸1.8路	Diameters	26"-38"/ 1.8Feeders per inch
	26"-38"/1英寸2路		26"-38"/ 2Feeders per inch
	26"-38"/1英寸2.1路		26"-38"/ 2.1Feeders per inch
针距	7G-32G	Gauge	7G-32G
路数	46F-68F	Feeders	46F-68F
	52F-76F		52F-76F
	54F-80F		54F-80F
转速	15-25 R.P.M	RPM	15-25 R.P.M
标准配备	提花专用送纱装置	Standard Equipment	Feeding units special used for computerized jacquard
	自动喷雾式加油装置		Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feeding stop motion sensor, needle breakage detectors
	卷布系统		Take down system
	自动除尘装置		Automaitc cleaning device
	纱架系统		Yarn creel system
	两工位/三工位选针系统		Two or Three way needle selection system
	电脑提花专用电控箱		Electric control cabinet special used for computerized jacquard
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system

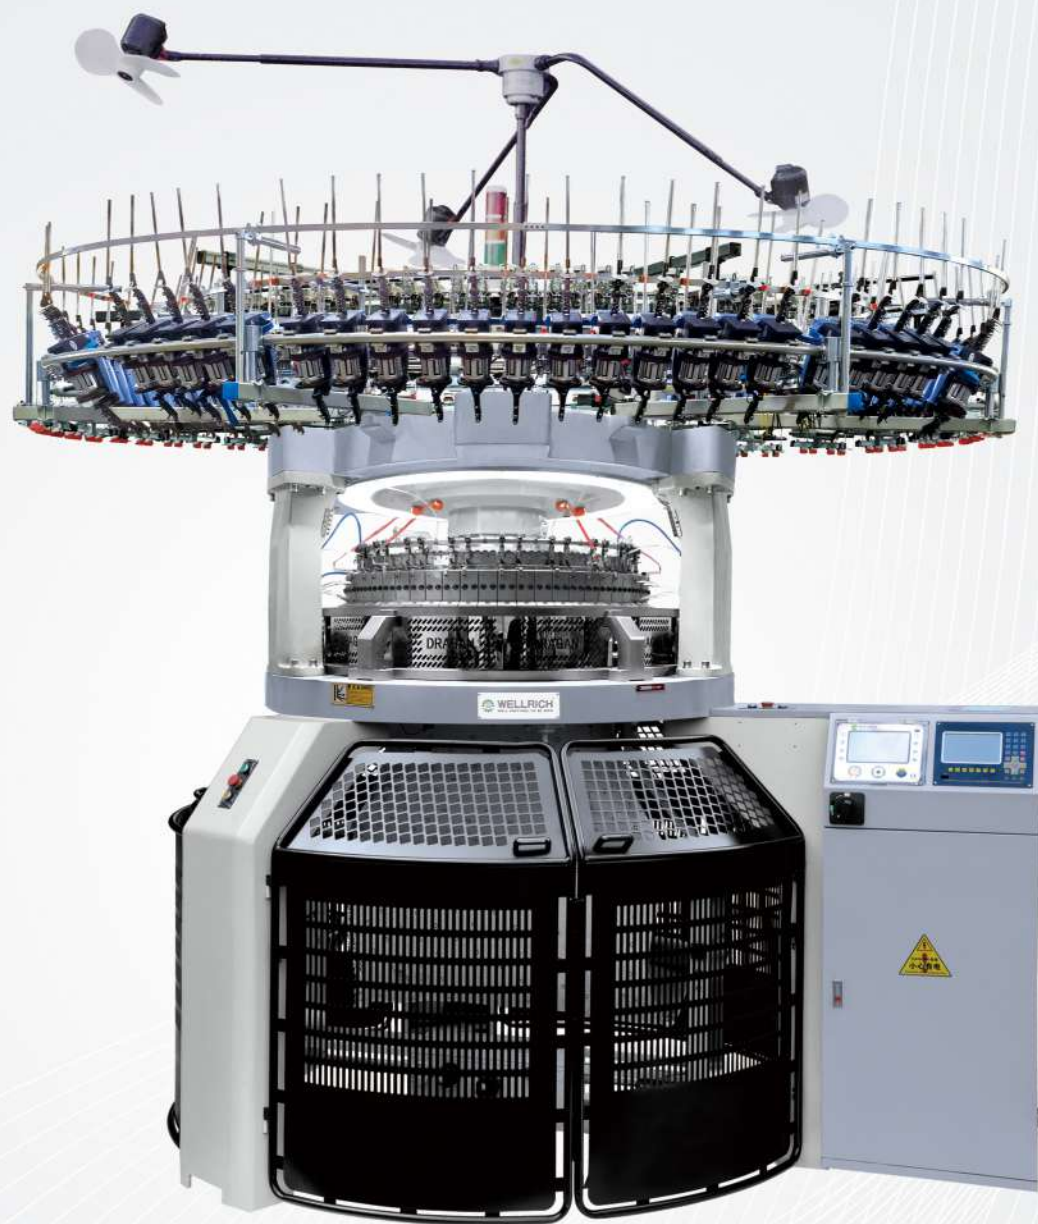

RIB-TF-JQ

### 移圈罗纹电脑提花机

Computerized Rib Transferred Jacquard Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 采用电脑控制系统，U盘输入花型进行选针提花，具有断电记忆功能，花型制版简单易用。
- 同步平稳可靠，为移圈动作及机器的高速运转奠定了良好的基础。
- 一机多用，除了能编织移圈罗纹提花布，也能编织普通的罗纹提花布，广泛应用于高档服装面料及装饰用布。
- Adopting computerized control system, patterns input by u disk for computerized needle selection, with power off memory function, pattern plate is simple to use.
- Synchronous transmission stable and reliable, build up a good basis for loop transfer and high speed rotation.
- Multi use of the machine can be woven both rib transferred jacquard fabrics and simple rib jacquard fabrics, the products are widely used in knitting upscale cloth fabrics and decorative fabrics.

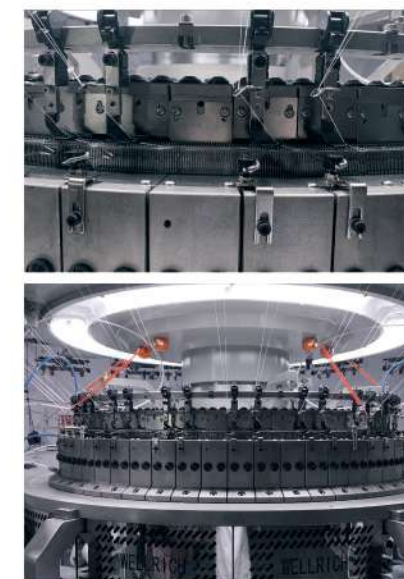

# WELLRICH

### 技术规格/TECHNICAL DATA

筒径	26"-38"	Diameters	26"-38"
针距	12G-22G	Gauge	12G-22G
路数	42F-60F	Feeders	42F-60F
转速	16-24 R.P.M	RPM	16-24 R.P.M
功率	4-5.5 KW	Power	4-5.5 KW
标准配备	自动喷雾式加油装置	Standard Equipment	Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feeding stop motion sensor, needle breakage detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
	两工位/三工位选针系统		Two or Three way needle selection system
	电脑提花专用电控箱		Electric control cabinet special used for computerized jacquard
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	摆布叠布装置		Folding device
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system



TR-JQ

## 毛巾电脑提花针织机

Computerized Terry Jacquard Circular Knitting Machine




追求卓越，锐不可当

WELL KNITTING TO BE RICH

## WELLRICH

### 机台特点 Machine Features

- 本系列机型采用电脑控制系统，U盘输入花型进行选针提花，具有断电记忆功能，花型制版简单易用，可进行三工位编织。
  - 充分考虑调试人员的操作习惯，机器调试、操作简单，易学易用。
  - 机器所有零部件从选材、加工、组装到调试均经过精心设计和生产过程在严格的品管控制之下进行，保证出厂的机器能够长期稳定在高精度的状态下运转。
- This series machine adopt computer control system, needle selection jacquard through patterns from usb flash disk, with power off memory function, pattern plate is simple to use, available with three way knit computerized needle selecting system.
  - Take a full consideration of user's operation habit, learning, debugging and operating machine easily.
  - All machine parts with meticulous care design and process of production under strict quality control from material selection, processing, assembling to debugging, which make sure that delivery machine could have long term stability operation under high precision condition.

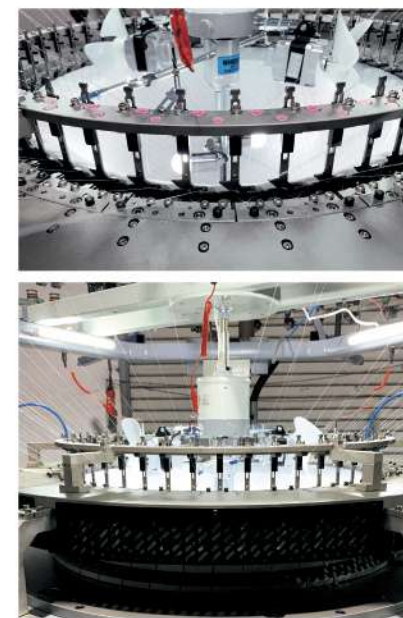

# WELLRICH

### 技术规格/TECHNICAL DATA

筒径	30"-52"	Diameters	30"-52"
针距	16G-22G	Gauge	16G-22G
路数	36F-72F	Feeders	36F-72F
转速	8-16 R.P.M	RPM	8-16 R.P.M
功率	3.5-7.5 KW	Power	3.5-7.5 KW
标准配备	自动喷雾式加油装置	Standard Equipment	Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feeding stop motion sensor, needle breakage detectors
	卷布系统		Take down system
	自动除尘装置		Automatic cleaning device
	纱架系统		Yarn creel system
	两工位/三工位选针系统		Two or Three way needle selection system
	电脑提花专用电控箱		Electric control cabinet special used for computerized jacquard
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system



HP-JQ

割圈绒电脑提花机

Computerized Jacquard Loop Cut Circular Knitting Machine



追求卓越，锐不可当

WELL KNITTING TO BE RICH

WELLRICH

机台特点 Machine Features

- 采用电脑控制系统，U盘输入花型进行选针提花，具有断电记忆功能，花型制版简单易用。
- 同步平稳可靠，为割圈提花及高速运转奠定了良好的基础。
- 可编织高低毛割圈织物，又可编织多个颜色，广泛用于服装面料、床上用品、工艺饰物、玩具、汽车地毯、家居地毯等领域，有较好的立体感。
- Adopting computerized control system , patterns input by U disk for computerized needle selection ,with power off memory function, Pattern plate is simple to use.
- Synchronous transmission stable and reliable,build up a good basis for loop cut jacquard and high speed rotation .
- Multi use of the machine can knit not only high pile and low pile fabrics,but also can knit multiple colours.The products are widely used in knitting upscale cloth fabrics, bedclothes,craft,toys,car mat,house carpet,etc, to get a better dimensionality.



WELLRICH

技术规格/TECHNICAL DATA

筒径	26"-38"	Diameters	26"-38"
针距	18G-24G	Gauge	18G-24G
路数	14F-20F	Feeders	14F-20F
转速	15-20 R.P.M	RPM	15-20 R.P.M
功率	4-5.5 KW	Power	4-5.5 KW
标准配备	自动喷雾式加油装置	Standard Equipment	Automatic lubrication device
	断纱自停和坏针自停装置		Yarn feeding stop motion sensor, needle breakage detectors
	卷布系统		Take down system
	自动除尘装置		Automaitc cleaning device
	纱架系统		Yarn creel system
	两功位/三功位选针系统		Two or Three way needle selection system
	电脑提花专用电控箱		Electric control cabinet special used for computerized jacquard
选配装置	氨纶准备装置	Optional Equipment	Lycra kits
	氨纶送纱装置		Lycra feeder units
	纱线输入测量装置		Yarn input measuring device
	大圆机联网系统		Circular knitting machine networking system